



# E600 Series With Blinds/Storm Panel 3 1/4" Frame Depth Fixed

## E600 SERIES FIXED

WITH BLINDS/  
STORM PANEL

### FEATURES

- ◇ Commercial Framing System
  - 3 1/4" main frame
  - Sealable corner keys
  - Screw connections
  - 0.094" wall thickness of interior and exterior walls, 0.070" wall thickness elsewhere
- ◇ Enhanced Design
  - Azon pour and debridge thermal break is 1/2" wide in all main frame and vent rail extrusions
  - Clean squared edges
  - 2" narrow sitalines
  - Blinds/Storm Panel applied to interior
- ◇ Glazing
  - 1" insulated glass

### OPTIONS

- ◇ Available Configurations
  - Wire frame capabilities
- ◇ Muntin Choices
  - Internal or simulated divided lites available
- ◇ Nailing Fin
- ◇ Glazing
  - Multiple Low-E and argon glazing choices Capillary tubes
  - Wide variety of glazing, tinting and thickness options
- ◇ Panning & Trim Choices
  - Wide variety of panning, receptor and trim available
- ◇ Mulling
  - Wide variety of structural mulls

### BENEFITS

- ◇ The capacity to match exterior colors for unique project facades
- ◇ The ability to facilitate large sizes for taller and wider window openings

### PERFORMANCE

- ◇ Structural & Thermal (test reports or thermal simulations available upon request)

Model	Fixed
Test Size	72" x 120"
NAFS Rating	AW-PG70
Structural Load P.S.F.	105.27
Air at 50 MPH (cfm/ft <sup>2</sup> )	<0.01
Water (No Penetration) P.S.F.	12.11
U-Value (ranges based on multiple Low-E/Argon combinations)	0.25-0.31
SHGC (ranges based on multiple Low-E/Argon combinations)	0.15-0.55

Our products are tested to the standards of and certified by some of the foremost organizations in the fenestration industry.






# E600 Series With Blinds/Storm Panel 3 1/4" Frame Depth Fixed


## E600 FIXED

## WITH BLINDS/ STORM PANEL


This document contains confidential and proprietary information intended for the private use of Quaker.  
 © 2016 Quaker Window Products Co., INC. All rights reserved.  
 Quaker reserves the right to change any/all designs without notice. Due to periodic re-certification requirements, result shown may vary.

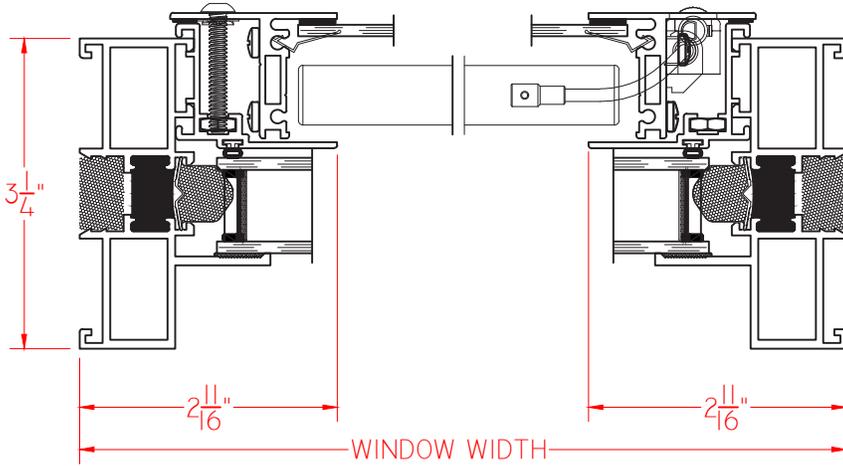

① HORIZONTAL  
CROSS SECTION

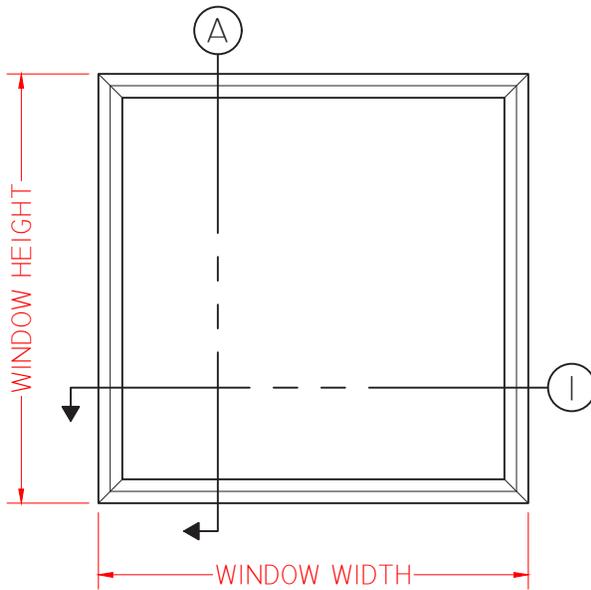

ELEVATION SCALE 3/4" = 1'-0"

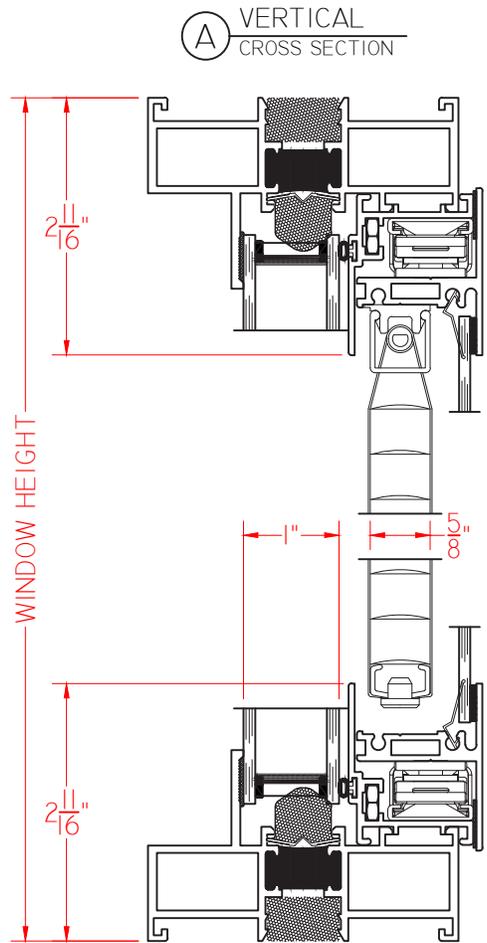

Ⓐ VERTICAL  
CROSS SECTION

SCALE 1:2

Our products are tested to the standards of and certified by some of the foremost organizations in the fenestration industry.

